
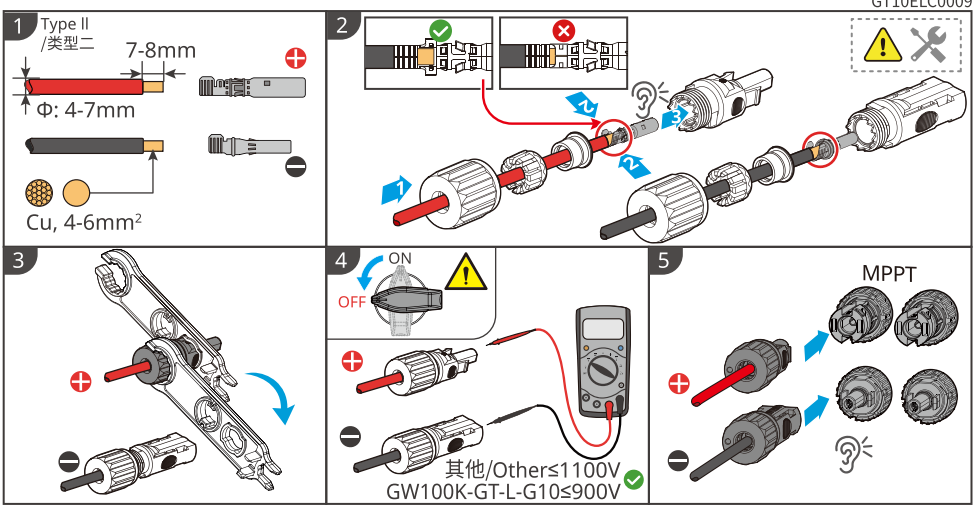
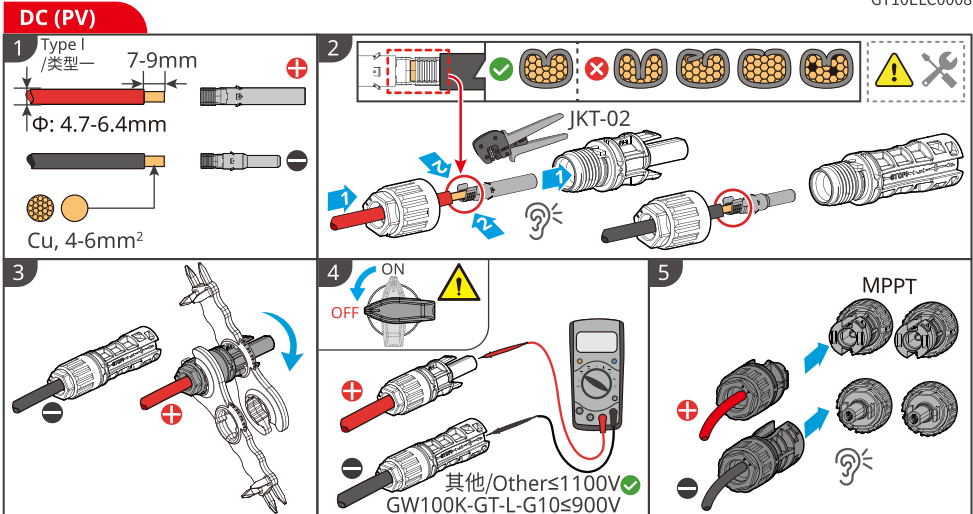


Procedure

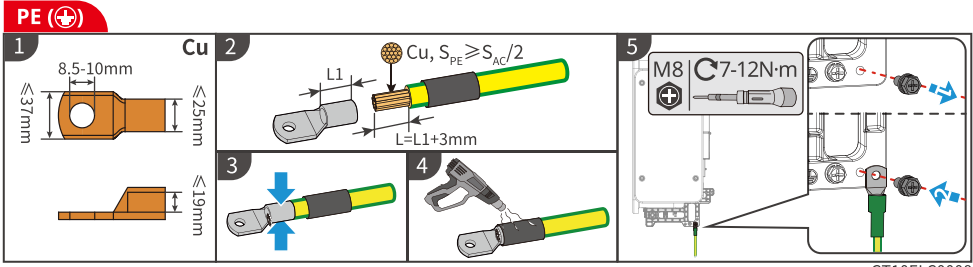

• : connect 1 PV string / 接入一串PV组串 ••: connect 2 PV strings / 接入两串PV组串

PV string quantity / PV组串数量	MPPT1	MPPT2	MPPT3	MPPT4	MPPT5	MPPT6	MPPT7	MPPT8	MPPT9	MPPT10
11	••	•	•	•	•	•	•	•	•	•
12	••	••	•	•	•	•	•	•	•	•
13	••	••	••	•	•	•	•	•	•	•
14	••	••	••	••	•	•	•	•	•	•
15	••	••	••	••	•	•	•	•	•	•
16	••	••	••	••	••	•	•	•	•	•
17	••	••	••	••	••	••	•	•	•	•
18	••	••	••	••	••	••	••	•	•	•
19	••	••	••	••	••	••	••	••	•	•
20	••	••	••	••	••	••	••	••	••	•

AC (AC OUTPUT)





Multi-core cable 多芯线 Single-core cable 单芯线 C+3mm

Cu Al

线径材质 Cable Material Cable Type A (mm) B (mm) D (mm) E (mm) F (mm) G (mm) H (mm) S_{AC1} (mm²) S_{AC2} (mm²)

Cu	L1/L2/L3	12.5-14	≤ 50	≤ 34	≤ 27	≤ 170	Φ : 14-34	Φ : 22-66	$S_{AC1}/2$	$S_{AC2}/2$
	N	12.5-14	≤ 37	≤ 25	≤ 19	-	-	-	-	-
	PE	8.5-10	≤ 37	≤ 25	≤ 19	-	-	-	-	-
Al	L1/L2/L3	12.5-14	≤ 50	≤ 38	≤ 27	≤ 170	Φ : 14-34	Φ : 22-66	$S_{AC1}/2$	$S_{AC2}/2$
	N	12.5-14	≤ 37	≤ 27	≤ 19	≤ 133	-	-	-	-

GT10ELC0014

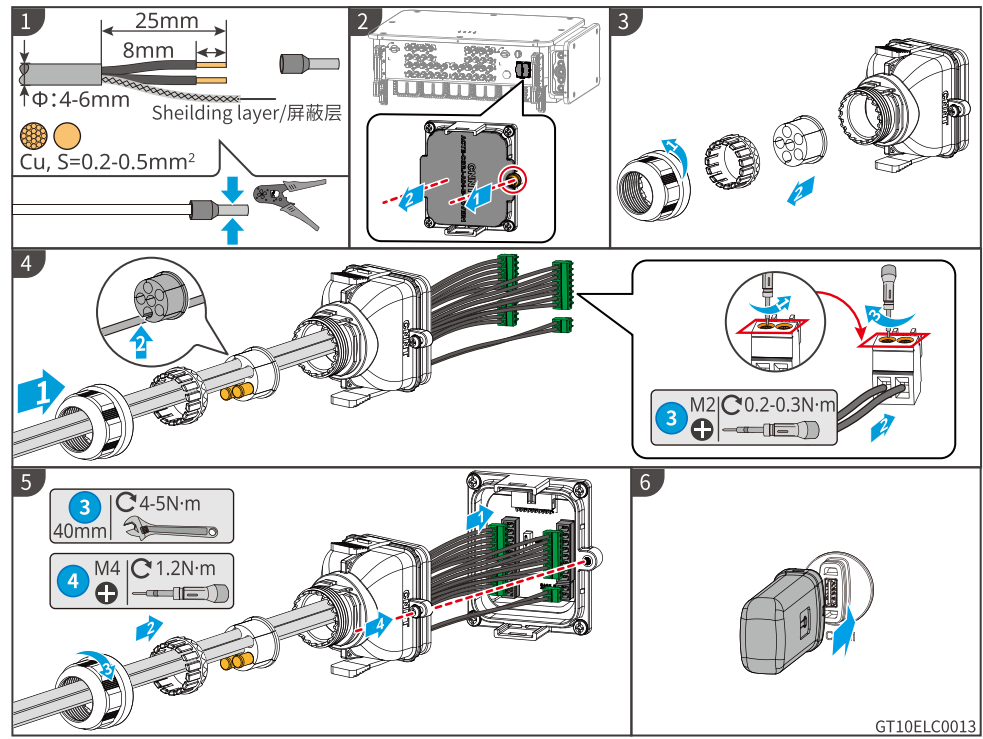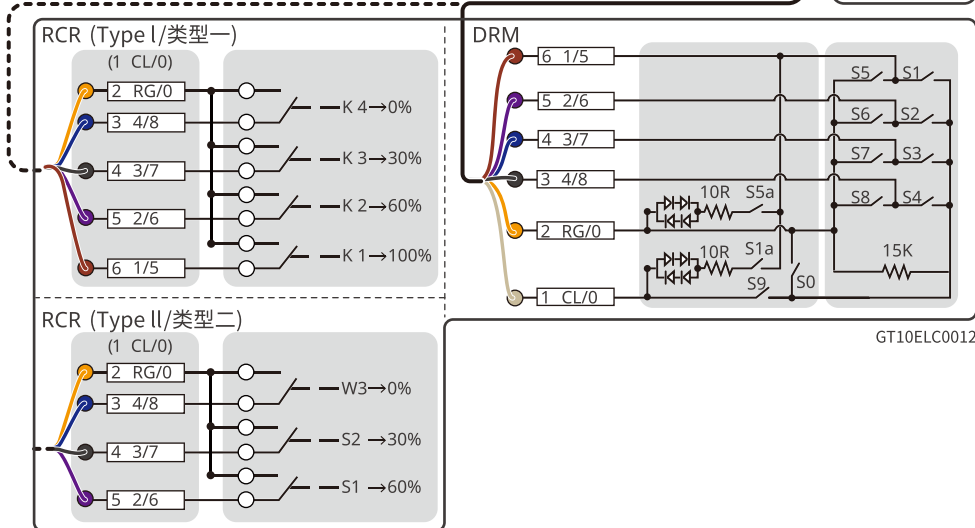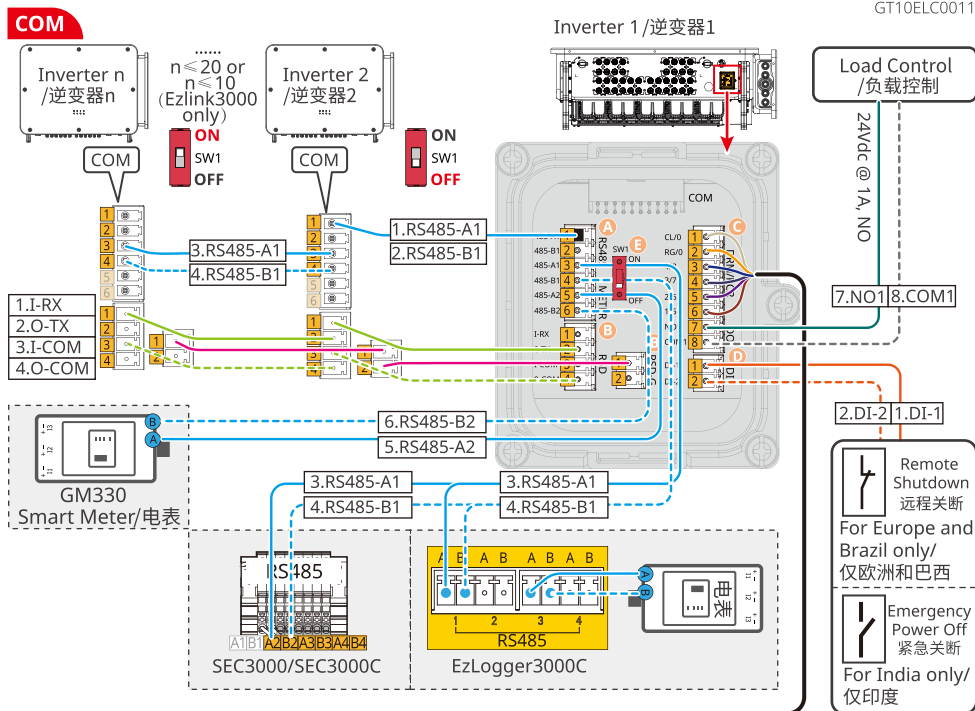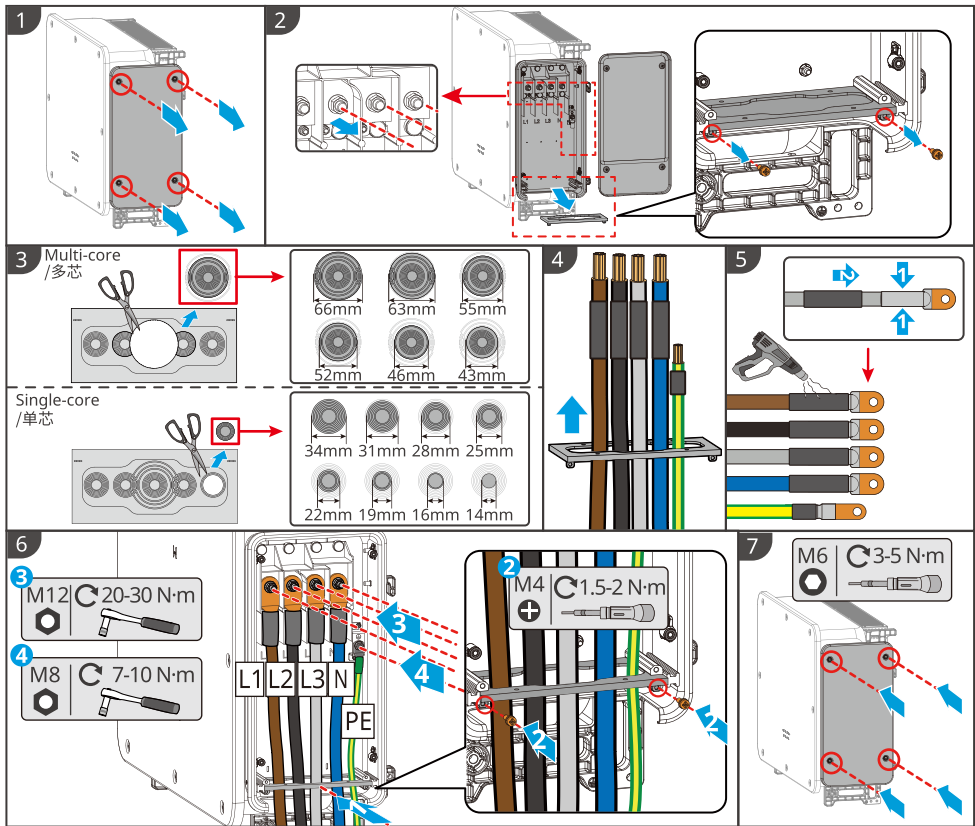

3 CS Uvedení do provozu a monitorování DE Inbetriebnahme und Überwachung
EN Commissioning and Monitoring ES Puesta en marcha y supervisión
FR Mise en service et surveillance HU Üzembe helyezés és felügyelet
IT Messa in servizio e monitoraggio NL Ingebruikname en bewaking
PL Uruchamianie i monitorowanie PT Colocação em funcionamento e monitorização
ZH 调试

